



## Mounting instructions

### Seat cover

#### Universal



60-120 min.

Universal		12.05.2025	1
-----------	--	------------	---


## Tips & Tricks

- Take your time to fit the seat covers correctly, it is a precise job
- You may still need to make an opening in the covers yourself in the right places, for example for an armrest or adjustment knob.
- - Make sure that all side seams of the covers are flush with the seam of the seat this is to ensure that the airbags in your seat work correctly. For a side AIRBAG, you need to mount the AIRBAG logo on the window side.
- The seat covers have a tight fit for optimal results. It may therefore take a little more force to fit them. Therefore, always apply force to the entire cover, and not just one part, the seam, the zip or the elastic. Be careful when applying force to the seam with the AIRBAG label.
- It may happen that the car's bulkhead is very tight against the seat. In this case, we recommend moving the seat forward or removing it.

Step by step:



- Remove the headrest. Fit the cover over the headrest, sometimes it is useful to do this with two people. One person can squeeze the headrest a little and the other can pull the cover over it and zip it shut or fasten the Velcro.

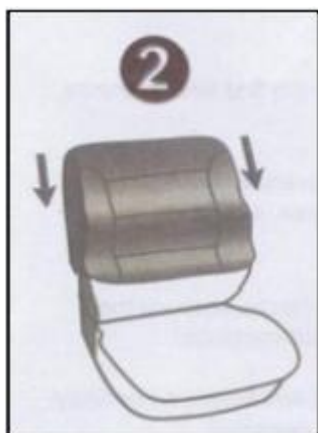

- Stretch the backrest cover over the backrest.



- Insert the flap between the seat and the backrest. Pull it gently until the cover forms nicely around the back of the seat.




- Then attach the flap to the cover. You can attach this flap to the inside of the backrest cover using the Velcro strip.



- Mount the seat cover. Here too, the fabric should be inserted between the seat and backrest. The elastic bands come out the back. Do not pull too hard, these are only to keep the cover in place



- Attach the rubber bands. You can attach these at the bottom of the chair frame, or you can attach them together. So attach the elastic from the left side with the one from the right side. And attach the elastic from the front with the one from the back. Please note! If your chair has plastic caps on the side of the seat, the seat cover should be inserted through them for mounting. So not over it. It is often best to remove the plastic covers and replace them after fitting..

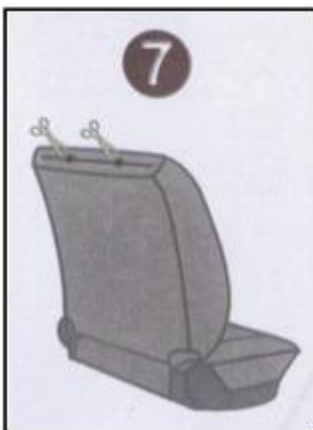

- Some covers have an opening for the headrest pre-finished, others have a Velcro strip you can use. There are also versions where a hole has to be made with scissors or a knife for the headrest. A special seam is made to prevent fraying.



- Finally, fit the headrest cover and put the headrest back on the backrest. Note! The cover may need to be tightened. Feel free to apply some force to get this done. This can vary per model.